

revolution RFP8

8,000 lbs. capacity FOUR POST LIFT

FEATURES:

- 72" (1829mm) lifting height
- Single point lock release
- Adjustable lock ladder
- Multi-position locks allow runways to be level at any lock position
- Standard 115V plug provided

↑
68" CLEARANCE UNDER RUNWAYS
↓



Model Shown: RFP8P000M
8,000 lbs. (3629kg) capacity
Available in black only




- Steel approach ramps
- Durable powder coat finish
- Available in black only
- ALI Gold Certified Lift

DOUBLE YOUR PARKING SPACE INSTANTLY!

RFP8 / RFP9 Lifts Include:



Three (3) Drip Trays

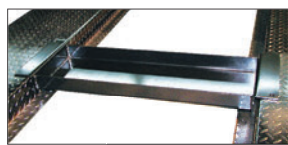

One (1) JackTray



Poly Caster Kit
INCLUDES FOUR (4) CASTERS

RFP8 / RFP9 Accessories



90° Power Unit Bracket
#S100046

Rolling Bridge Jacks
(Manual operation)
3,500 lb. Capacity
#RJ35BK



4,500 lb. Capacity #RRJ45GBK
7,000 lb. Capacity Air / hydraulic operation
#RJ70GBK



Solid Deck Panels
Floor panels to fill space between runways for versatile storage needs.

#H4D-8000 (RFP8 ONLY)
Requires 8 panels for full deck floor.

#SH4D-9000 (RFP9 ONLY)
Requires 8 panels for full deck floor.

Drive-thru Ramps (RFP9 ONLY)
#SH4D-6000G

Specifications	RFP8	RFP9
Capacity	8,000 lbs. (3629kg)	9,000 lbs. (4082kg)
Rise	72" (1829mm)	84" (2134mm)
Overall length with approach ramps	207-1/2" (5270mm)	225 - 1/2" (5728mm)
Overall length without approach ramps	175 -1/2" (4458mm)	192 -1/2" (4889mm)
Overall width w/o motor	103 -1/2" (2629mm)	121" (3073mm)
Approach ramp Length	32" (813mm)	36 - 1/4" (921mm)
Runway width	18 -1/2" (470mm)	21 - 1/2" (546mm)
Runway length	169 -1/2" (4305mm)	188" (4775mm)
Runway height	4 -1/2" (114mm)	4 - 3/4" (121mm)
Height of columns	81 -1/2" (2070mm)	97" (2464mm)
Clearance between columns	94" (2388mm)	109 - 1/2" (2781mm)
Clearance between runways	38" (965mm)	39" (991mm)
Outside runway to outside runway	75" (1905mm)	82" (2083mm)
Clearance under runway	68" (1727mm)	79 - 1/4" (2013mm)
Motor specs	110VAC, 1HP	110VAC, 1HP

LIFTS AVAILABLE IN BLACK ONLY

revolution RFP9

9,000 lbs. capacity FOUR POST LIFT



Model Shown: RFP9P000M
9,000 lbs. (4082kg) capacity
Available in black only

PERFECT FOR HOME USE!

FEATURES:

- 84" (2134mm) lifting height
- Single point lock release
- Adjustable lock ladder
- Multi-position locks allow runways to be level at any lock position



- Standard 115V plug provided
- Steel approach ramps
- Durable powder coat finish
- Available in black only
- ALI Gold Certified Lift

Will these lifts fit in my shop or garage?


Example: Required Height Calculator for RFP9

Step 1: Determine drive under height

(d) Using the following lock heights, round your bottom vehicle height up to the nearest lock height. (See illustration to the right)

RFP9 model under runway lock heights:

17" / 431mm	35" / 889mm	53" / 1346mm	71" / 1803mm
23" / 584mm	41" / 1041mm	59" / 1498mm	77" / 1955mm
29" / 736mm	47" / 1193mm	65" / 1651mm	

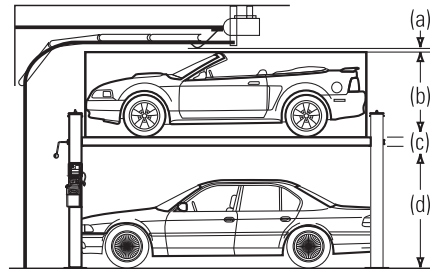

For help in calculating your required ceiling height for RFP8 and RFP9 lifts, go to www.revolutionlift.com and click on **LIFT SELECTION GUIDE**.

Step 2: Calculate your required height to the lowest obstruction

(a) Min. clearance to lowest obstruction	2" / 50mm
(b) Top vehicle height	+ _____
(c) Runway height	+ 5" / 127mm
(d) Drive under height (from step 1)	+ _____
Required clearance height	= _____

revolution

www.revolutionlift.com

2700 Lanier Drive / Madison, IN 47250

Phone: 812.273.1622 / sales@revolutionlift.com

Lit# REVOLUTION RFP8_RFP9 cutsheet_2019.02

©2019 Vehicle Service Group™. Printed in the U.S.A., All Rights Reserved. Unless otherwise indicated, Revolution Lift®, Vehicle Service Group™, DOVER and all other trademarks are property of Dover Corporation and its affiliates.